



丸形端子(R形)




JQ0608019


JQID08002

UL LISTED E42024

LR20812

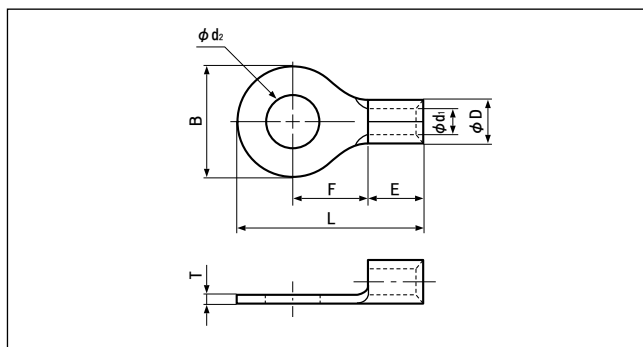JIS JQMY14001
JIS C 2805

形 番	規 格	寸 法(mm)								適 用 電 線 範 囲			適 用 圧 着 工 具			1箱 入数 (個)																																
		ød2	B	L	F	E	øD	ød1	T	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式																																	
0.5-2	 	2.2	5.2	12.4	5.8	4.0	2.0	1.0	0.5	0.35 ∩ 0.7	0.2 ∩ 0.5	26 ∩ 22	YHT-2622	YA-1,YA-2 YAT-1A YAT-2A YAD-1A YAD-2A	BCT-0555L	1,000																																
0.5-3	 	3.2	6.6	15.0	7.7																																											
0.5-3.7	 	3.7																																														
0.5-4	 	4.3																																														
0.5-5	 	5.3															7.0																															
1.25-2	 	2.2	5.5	11.5	4.0	4.8	3.4	1.7	0.8	0.57 ∩ 1.44	0.25 ∩ 1.65	22 ∩ 16	YHT-2210 YHT-2214M	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0555L	1,000																																
R1.25-3	 	3.2		13.2	5.6																																											
1.25-MS3	 			6.6	14.4												6.3																															
1.25-M3.3	 			8.0	15.8												7.0																															
1.25-L3	 			3.7	5.5												11.5	4.0																														
1.25-3.7	 	13.9	6.3																																													
1.25-P3.5	 	6.6			14.4												6.3																															
R1.25-3.5(1.25-M3)	 	6.8			16.8												8.0																															
HK1.25-L3	 	4.3		8.0	15.8												7.0																															
1.25-L3.7	 		6.6	14.4	6.3																																											
1.25-M4	 		8.0	15.8	7.0																																											
R1.25-4	 		5.3	9.0	20.4												11.1																															
1.25-4NS	 	8.0		15.8	7.0																																											
R1.25-5	 	6.4		11.6	21.7												11.1																															
1.25-5NS	 			9.0	20.4																																											
1.25-L5	 		10.5	13.6	25.5													13.9																														
1.25-6	 		13.0	19.0	31.0													16.7																														
1.25-8	 	3.2	6.4	12.3	4.3												4.8	4.1	2.3	0.8	1.14 ∩ 1.82	1.04 ∩ 2.63	16 ∩ 14	YHT-2210 YHT-2214M	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0555L	1,000																					
1.25-10	 		5.5	13.2	5.6																																											
1.25-12	 		6.4	12.3	4.3																																											
2-S2	 		6.6	14.4	6.3																																											
2-MS3	 		8.5	16.8	7.8																																											
2-S3.3	 	3.7	5.5	13.9	6.3																																											
RCT2-3	 		6.4	12.3	4.3																																											
2-M3.3	 		6.6	14.4	6.3																																											
2-3	 		6.4	12.3	4.3																																											
2-MS3.5	 	4.3	6.6	14.4	6.3																																											
2-S3	 		6.8	16.8	7.8																																											
R2-3.5(2-M3)	 		7.0	16.0	7.7																																											
HK2-3	 		8.5	16.8	7.8																																											
2-P3.5		5.3	6.6	14.4	6.3																																											
2-3.7			6.8	16.8	7.8																																											
2-M4			7.0	16.0	7.7																																											
HK2-4			8.5	16.8	7.8																																											
2-P4		6.4	9.0	20.3	11.0																																											
R2-4			8.5	16.8	7.8																																											
2-4NS			8.5	16.8	7.8																																											
2-M5			9.0	20.3	11.0																																											
2-5NS		8.4	9.5	16.8	7.3																																											
R2-5			12.0	21.8	11.0																																											
R2-6			8.4	13.6	25.5																																											
R2-8			5.5	13.2	5.6																																											
2-S2		3.2	6.4	12.3	4.3																							4.8	4.1	2.3	0.8	1.14 ∩ 1.82	1.04 ∩ 2.63	16 ∩ 14	YHT-2210 YHT-2214M	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0555L	1,000										
2-MS3			5.5	13.2	5.6																																											
2-S3.3			6.4	12.3	4.3																																											
RCT2-3			6.6	14.4	6.3																																											
2-M3.3		8.5	16.8	7.8																																												
2-3		3.7	5.5	13.9	6.3																																											
2-MS3.5			6.4	12.3	4.3																																											
2-S3			6.6	14.4	6.3																																											
R2-3.5(2-M3)			6.8	16.8	7.8																																											
HK2-3		4.3	7.0	16.0	7.7																																											
2-P3.5			8.5	16.8	7.8																																											
2-3.7			6.6	14.4	6.3																																											
2-M4			6.8	16.8	7.8																																											
HK2-4		5.3	7.0	16.0	7.7																																											
2-P4			8.5	16.8	7.8																																											
R2-4			9.0	20.3	11.0																																											
2-4NS			8.5	16.8	7.8																																											
2-M5		6.4	9.0	20.3	11.0																																											
2-5NS			9.5	16.8	7.3																																											
R2-5			12.0	21.8	11.0																																											
R2-6			8.4	13.6	25.5																																											
R2-8		8.4	5.5	13.2	5.6											4.8																							4.1	2.3	0.8	1.14 ∩ 1.82	1.04 ∩ 2.63	16 ∩ 14	YHT-2210 YHT-2214M	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0555L	1,000
2-S2			6.4	12.3	4.3																																											
2-MS3			5.5	13.2	5.6																																											
2-S3.3			6.4	12.3	4.3																																											
RCT2-3		6.6	14.4	6.3																																												
2-M3.3		8.5	16.8	7.8																																												
2-3		3.7	5.5	13.9	6.3																																											
2-MS3.5			6.4	12.3	4.3																																											
2-S3			6.6	14.4	6.3																																											
R2-3.5(2-M3)			6.8	16.8	7.8																																											
HK2-3		4.3	7.0	16.0	7.7																																											
2-P3.5			8.5	16.8	7.8																																											
2-3.7			6.6	14.4	6.3																																											
2-M4			6.8	16.8	7.8																																											
HK2-4		5.3	7.0	16.0	7.7																																											
2-P4			8.5	16.8	7.8																																											
R2-4			9.0	20.3	11.0																																											
2-4NS			8.5	16.8	7.8																																											
2-M5		6.4	9.0	20.3	11.0																																											
2-5NS			9.5	16.8	7.3																																											
R2-5			12.0	21.8	11.0																																											
R2-6			8.4	13.6	25.5																																											
R2-8		8.4	5.5	13.2	5.6	4.8	4.1	2.3	0.8	1.14 ∩ 1.82	1.04 ∩ 2.63	16 ∩ 14	YHT-2210 YHT-2214M	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0555L		1,000																															
2-S2			6.4	12.3	4.3																																											
2-MS3			5.5	13.2	5.6																																											
2-S3.3			6.4	12.3	4.3																																											
RCT2-3		6.6	14.4	6.3																																												
2-M3.3		8.5	16.8	7.8																																												
2-3		3.7	5.5	13.9	6.3																																											
2-MS3.5			6.4	12.3	4.3																																											
2-S3			6.6	14.4	6.3																																											
R2-3.5(2-M3)			6.8	16.8	7.8																																											
HK2-3		4.3	7.0	16.0	7.7																																											
2-P3.5			8.5	16.8	7.8																																											
2-3.7			6.6	14.4	6.3																																											
2-M4			6.8	16.8	7.8																																											
HK2-4		5.3	7.0	16.0	7.7																																											
2-P4			8.5	16.8	7.8																																											
R2-4																																																

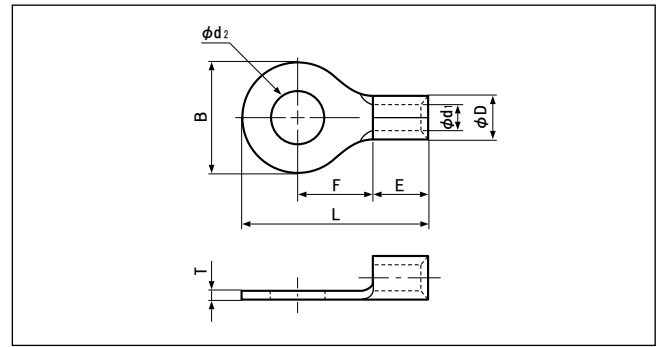


形 番	規 格	寸 法(mm)								適用電線範囲			適用圧着工具			1箱 入数 (個)											
		ød2	B	L	F	E	øD	ød1	T	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式												
2-10	 	10.5	13.6	25.5	13.9	4.8	4.1	2.3	0.8	1.14 ∟ 1.82	1.04 ∟ 2.63	16 ∟ 14	YHT-2210 YHT-2214M	YA-1,YA-2 YAT-1A,YAT-2A YAD-1A,YAD-2A YA-4,YAT-4A YAD-4A	BCT-0555L	1,000											
2-12	 	13.0	19.0	31.0	16.7											500											
2-14	 	15.0	27.0	39.5	21.2																						
2-16	 	17.0																									
2-20	 	21.0																									
3.5-R3	 	3.2	8.0	17.8	9.0	4.8	4.8	2.7	1.0	—	3.5	12	YHT-2210 (ダイスマーク・5)	—	BCT-0555L	1,000											
3.5-R4	 	4.3																									
3.5-4	 	10.3	18.6	8.6																							
3.5-R5	 	5.3	8.0	17.8	9.0																						
3.5-5	 		10.3	18.6	8.6																						
3.5-6	 	6.4															5.6	3.4	1.0	1.82 ∟ 2.89	2.63 ∟ 6.64	12 ∟ 10	YHT-2210	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0555L	500	
RCT5.5-3	 	3.2	6.5	15.4	5.9	6.2																					
5.5-S3.3	 		7.2	15.7																							
5.5-3	 		9.5	19.8	8.3	6.8																					
5.5-S3	 	3.7	7.2	15.7	5.9	6.2	500																				
HK5.5-3.7	 		9.5	19.8	8.3	6.8																					
5.5-3.7	 																										
5.5-S4	 	4.3	7.2	15.7	5.9	6.2	1,000																				
HK5.5-4	 		8.0	19.1																							
5.5-4NS	 																										
R5.5-4	  	5.3	9.5	19.8	8.3		500																				
5.5-5NS	 		8.0	19.1			1,000																				
R5.5-5	  		9.5	19.8			500																				
5.5-S5	 	6.4	13.2	22.4	9.0		1,000																				
5.5-6NS	 		9.0	24.3	13.0		500																				
R5.5-6	  		12.0	25.8																							
5.5-S6	 	8.4	13.2	22.4	9.0		500																				
5.5-L6	 		15.0	28.0	13.7																						
5.5-S8	 		13.2	22.4	9.0																						
R5.5-8	  	10.5	15.0	28.0	13.7		200																				
R5.5-10	  		13.0	19.2	32.4	16.0																					
5.5-12	 		15.0																								
5.5-16	 	17.0	32.0	48.1	25.3											200											
5.5-18	 	19.0																									
5.5-20	 	21.0																									

注1) 100個入をご用意している製品もあります。詳細は弊社までお問い合わせください。


注2) 本製品の中には多少納期を要するものもあります。



■ 丸形端子(R形)

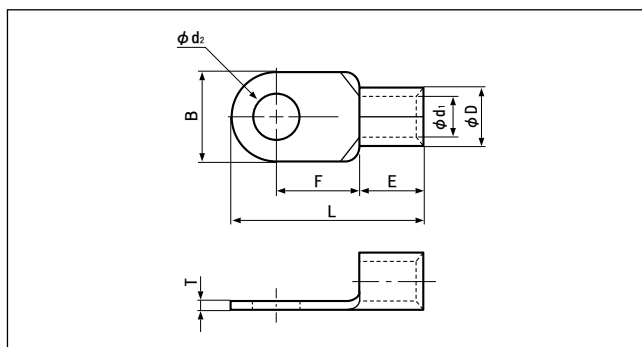


形 番	規 格	寸 法(mm)									適用電線範囲			適用圧着工具			1箱 入数 (個)																						
		ød2	B	L	F	E	øD	ød1	T	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式																								
8-NK4	 	4.3	9.0	16.5	5.8	6.2	7.1	4.5	1.2	2.89 ∟ 3.65	6.64 ∟ 10.52	8	—	YA-4 (ダイス) AD-901S	YPT-60N (ダイス)8NK-6 (本体)YF-1,E-4, (ヘッド)YET-60-1 (ダイス)8NK-6	500																							
8-NK5	 	5.3																																					
8-4NS	 	4.3	8.0	21.8	9.3	13.8											1,000																						
8-4	 		12.0	23.8													500																						
8-5NS	 	5.3	9.0	22.3	9.3												1,000																						
R8-5	  		12.0	23.8													500																						
8-L5NS	 	6.4	9.0	26.8	9.3												500																						
8-L5	 		15.0	29.8													1,000																						
8-6NS	 	8.4	9.6	22.6	9.3												500																						
R8-6	  		12.0	23.8													1,000																						
8-L6	  	10.5	15.0	29.8	13.8												500																						
8-8NS	  		11.5	28.1													1,000																						
R8-8	  	15.0	15.0	29.8	13.8												500																						
R8-10	  		20.0	33.5													200																						
8-11	  	11.5	31.6	50.0	25.7												200																						
8-12	  	13.0																																					
8-14	  	15.0																																					
8-16	  	17.0																																					
8-18	  	19.0																																					
8-20	  	21.0																																					
14-4	  	4.3	12.0	29.8	13.3	10.5	9.0	5.8	1.5	3.65 ∟ 4.62	10.52 ∟ 16.78	6	—	YA-4 YA-5 YAT-4A YAD-4A	YPT-60N YPT-150-1 BCT-860L-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-60-1 YET-150-2	100																							
14-NK5	  	5.3	12.2	23.0	7.7	9.2																																	
14-5NS	  	5.3	9.0	28.3	13.3	10.5																																	
R14-5	  		12.0	29.8																																			
14-6NS	  	6.4	9.6	28.6	14.5																																		
R14-6	  		12.0	29.8																																			
14-L6	  	8.4	16.0	32.8	14.5																																		
14-8NS	  		11.5	30.8																																			
14-S8	  	10.5	12.0	31.0	19.5																																		
R14-8	  		16.0	32.8																																			
R14-10	  	15.0	22.0	41.0	23.5																																		
14-11	  		30.0	49.0																																			
R14-12	  	17.0	31.6	51.5	25.2																																		
14-14	  		21.0																																				
14-16	 	12.0	31.6	51.5	24.5																																		
14-18			19.0																																				
14-20		21.0																																					
22-5NS		5.3	9.5	28.7	12.0	12.0	11.5	7.7	1.8	4.62 ∟ 5.81	16.78 ∟ 26.66	4	—	YA-5	YPT-60N YPT-150-1 BCT-860L-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-60-1 YET-150-2	100																							
22-S5			12.0	30.0																																			
22-5		6.4	16.5	33.7	13.5																																		
22-S6			12.0	30.0																																			
R22-6		8.4	16.5	33.7	13.5																																		
22-S8			12.0	30.0																																			
R22-8		10.5	16.5	33.7	13.5																																		
22-S10			17.5	36.7																																			
R22-10		11.5	22.0	42.5	19.5																																		
22-11			30.0	51.5																																			
R22-12		15.0	30.0	51.5	24.5																																		
R22-14																																							
22-16																																							
22-18																																							
22-20		21.0																																					


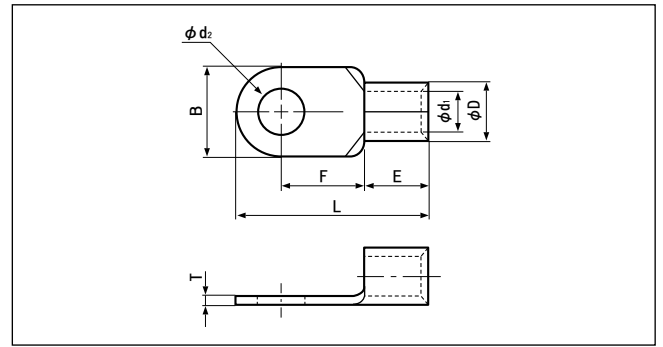


形 番	規 格	寸 法(mm)								適用電線範囲			適用圧着工具			1箱 入数 (個)
		ød ₂	B	L	F	E	øD	ød ₁	T	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式	
38-S5	 	5.3	15.5	38.0	16.0	14.0	13.3	9.4	1.8	5.81 ∟ 7.34	26.66 ∟ 42.42	2	—	YA-5	YPT-60N YPT-150-1 BCT-860L-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-60-1 YET-150-2	100
38-5	 		22.0	42.7	17.7											
38-S6	 	6.4	15.5	38.0	16.0											
38-6	 		22.0	42.7	17.7											
38-S8	 	8.4	15.5	38.0	16.0											
R38-8	  		22.0	42.7	17.7											
38-L8	 	10.5	30.0	52.5	23.5											
38-S10	 		15.5	38.0	16.0											
R38-10	  	11.5	22.0	42.7	17.7											
38-L10	 		30.0	52.5	23.5											
38-11	 	13.0	22.0	42.7	17.7											
R38-12	  	15.0	30.0	52.5	23.5											
R38-14	  	17.0														
38-16	 	19.0	32.0	57.5	23.5											
38-18	 	21.0														
38-20	 	23.0	18.0	15.5	11.4	2.0	7.34 ∟ 8.26	42.42 ∟ 60.57	1/0	—	YA-5	YPT-60N YPT-150-1 BCT-860L-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-60-1 YET-150-2 YET-300-1 YET-300N	50			
60-S6	 	6.4												16.0	46.7	
60-6	 													22.0	49.7	
60-S8	 	8.4												16.0	46.7	
R60-8	  													22.0	49.7	
60-S10	 	10.5												16.0	46.7	
R60-10	  													22.0	49.7	
60-11	 	13.0												32.0	57.5	23.5
R60-12	  	15.0														
R60-14	  	17.0												32.0	61.0	26.0
60-16	 	19.0														
60-18	 	21.0												24.0	51.0	20.0
60-20	 	23.0														
70-6	 	6.4												24.0	51.0	20.0
70-8	 	8.4														
70-10	 	10.5	32.0	61.0	26.0											
70-11	 	11.5														
70-12	 	13.0	27.0	54.2	20.7											
70-14		15.0														
70-16		17.0	32.0	68.0	32.0											
70-18		19.0														
70-20		21.0	20.0	19.5	14.5	2.3	9.27 ∟ 10.41	76.28 ∟ 96.3	3/0	—	—	YPT-150-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-150-2 YET-300-1 YET-300N	25			
70-22		23.0														
80-6		6.4	27.0	54.2	20.7											
80-8		8.4														
80-10		10.5	32.0	68.0	32.0											
80-11		11.5														
80-12		13.0	20.0	19.5	14.5	2.3	9.27 ∟ 10.41	76.28 ∟ 96.3	3/0	—	—	YPT-150-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-150-2 YET-300-1 YET-300N	25			
80-L10		10.5														
80-L12		13.0	32.0	68.0	32.0											
80-14		15.0														
80-16		17.0	24.0	51.0	20.0											
80-18		19.0														
80-20		21.0	27.0	54.2	20.7											

注) 本製品の中には多少納期を要するものもあります。




■丸形端子(R形)

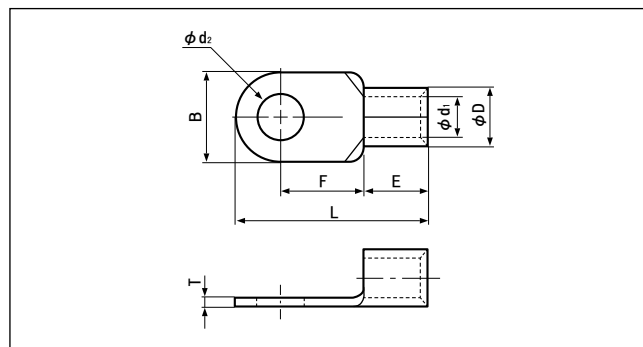


形 番	規 格	寸 法(mm)								適 用 電 線 範 囲			適 用 圧 着 工 具			1箱 入数 (個)											
		ød ₂	B	L	F	E	øD	ød ₁	T	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式												
100-6	 	6.4	28.5	55.6	20.4	21.0	22.3	16.4	2.6	10.41 ∩ 11.68	96.3 ∩ 117.2	4/0	—	—	YPT-150-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-150-2 YET-300-1 YET-300N	25											
100-8	 	8.4																									
R100-10	  	10.5																									
R100-12	  	13.0																									
100-L8	 	8.4	32.0	69.0	32.0					21.0	22.3	16.4	2.6	10.41 ∩ 11.68			96.3 ∩ 117.2	4/0	—	—	YPT-150-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-150-2 YET-300-1 YET-300N	25					
100-L10	 	10.5																									
100-L12	 	13.0																									
R100-14	  	15.0																									
R100-16	  	17.0																									
R100-18	  	19.0																									
R100-20	  	21.0																									
100-22	 	23.0																									
R150-10	  	10.5	36.0	66.0	21.0	27.0	26.5	19.5	3.2						11.68 ∩ 13.8	117.2 ∩ 152.05							250/300 MCM	—	—	YPT-150-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-150-2 YET-300-1 YET-300N	20
R150-12	  	13.0																									
R150-14	  	15.0																									
R150-16	  	17.0		68.0	23.0																						
R150-18	  	19.0																									
R150-20	  	21.0																									
150-6	 	6.4		66.0	23.0					27.0	26.5	19.5	3.2	11.68 ∩ 13.8			117.2 ∩ 152.05	250/300 MCM	—	—	YPT-150-1 BCT-8150L-B (本体) YF-1 E-4 (ヘッド) YET-150-2 YET-300-1 YET-300N	20					
150-8	 	8.4																									
150-10	 	10.5																									
150-11	 	11.5																									
150-12	 	13.0																									
150-16	 	17.0																									
150-22	 	23.0		81.0	36.0																						
150-24	 	25.0																									
150-27	 	28.0																									
150-L8	 	8.4																									
150-L10	 	10.5																									
150-L12	 	13.0																									
150-L16		17.0																									
180-8		8.4	38.5			69.0	24.5	28.5	28.5						21.0	3.5							13.8 ∩ 15.6	152.05 ∩ 192.60	350MCM	—	—
180-10		10.5																									
180-12		13.0																									
180-14		15.0																									
180-16		17.0		86.8	39.0																						
180-20		21.0																									
180-L10		10.5																									
180-L12		13.0																									
180-L16		17.0																									

注) 本製品の中には多少納期を要するものもあります。

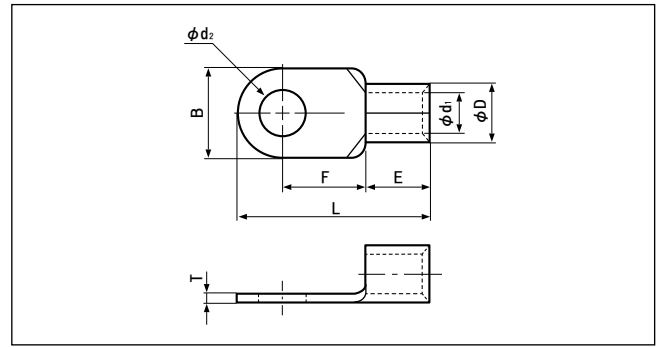

形 番	規 格	寸 法(mm)								適 用 電 線 範 囲			適 用 圧 着 工 具			1箱 入数 (個)											
		φd ₂	B	L	F	E	φD	φd ₁	T	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式												
R200-12	  	13.0	44.0	78.0	24.5	31.5	32.7	24.0	4.0	15.6 ∩ 17.5	192.60 ∩ 242.27	400MCM	—	—	(本体) YF-1 E-4 (ヘッド) YET-300-1 YET-300N	10											
R200-14	  	15.0																									
R200-16	  	17.0																									
R200-18	  	19.0																									
R200-20	  	21.0																									
R200-22	  	23.0		91.0	37.5																						
R200-24	  	25.0																									
R200-27	  	28.0																									
200-8	 	8.4		72.0	24.5																						
200-10	 	10.5																									
200-11	 	11.5																									
200-12	 	13.0																									
200-14	 	15.0																									
200-16	 	17.0																									
200-L8	 	8.4		91.0	37.5																						
200-L10	 	10.5																									
200-L12	 	13.0																									
200-L16	 	17.0																									
250-12		13.0	44.0	78.0	24.5	31.5	35.6	26.0	4.5	—	250	—	—	—	(本体) YF-1 E-4 (ヘッド) YET-300-1	10											
250-14		15.0																									
250-16		17.0																									
R325-16	  	17.0	50.5	94.2	33.5	35.5	37.6	28.0	4.5	17.5 ∩ 20.3	242.27 ∩ 325	600/650 MCM	—	—	(本体) YF-1 E-4 (ヘッド) YET-300-1 YET-300N	5											
R325-18	  	19.0																									
R325-20	  	21.0																									
R325-22	  	23.0		105.7	45.0																						
R325-24	  	25.0																									
R325-27	  	28.0																									
325-8	 	8.4																									
325-10	 	10.5		88.0	33.5																						
325-11	 	11.5																									
325-12	 	13.0																									
325-14	 	15.0																									
325-16	 	17.0																									
325-L8	 	8.4		105.7	45.0																						
325-L10	 	10.5																									
325-L12	 	13.0																									
325-L16	 	17.0																									


注) 本製品の中には多少納期を要するものもあります。



丸形端子 NSシリーズ (取り付け幅狭タイプ)



UL E42024 SP LR20812

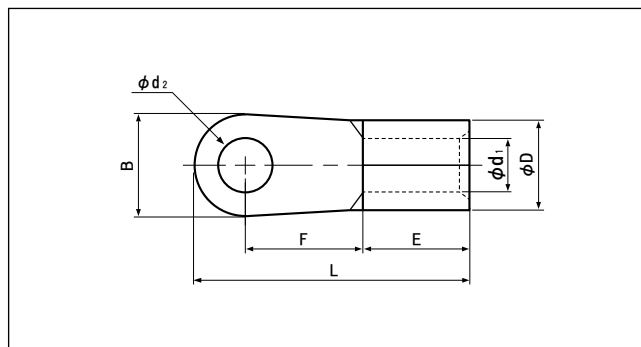


形番	規格	寸法(mm)								適用電線範囲			適用圧着工具			1箱 入数 (個)
		ød ₂	B	L	F	E	øD	ød ₁	板厚	単線(mm)	撚線(mm ²)	AWG(#)	手動	空気圧式	油圧式	
5.5-4NS	UL SP	4.3	8.0	19.1	8.3	6.8	5.6	3.4	1.0	1.82	2.63	12~10	YHT-2210	YA-1, YA-2, YAT-1A, YAT-2A, YAD-1A, YAD-2A	BCT-0555L	1,000
5.5-5NS	UL SP	5.3	8.0	19.1	8.3	6.8	5.6	3.4	1.0	2.89	6.64	12~10	YHT-2210	YA-4, YAT-4A, YAD-4A	BCT-0555L	1,000
5.5-6NS	UL SP	6.4	9.0	24.3	13.0	6.8	5.6	3.4	1.0	2.89	6.64	12~10	YHT-2210	YA-4, YAT-4A, YAD-4A	BCT-0555L	1,000
8-4NS	UL SP	4.3	8.0	21.8	9.3	8.5	7.1	4.5	1.2	2.89	6.64	8	YHT-8S	YA-4, YA-5 YAT-4A, YAD-4A	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	1,000
8-5NS	UL SP	5.3	9.0	22.3	9.3	8.5	7.1	4.5	1.2	2.89	6.64	8	YHT-8S	YA-4, YA-5 YAT-4A, YAD-4A	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	500
8-L5NS	UL SP	5.3	9.0	26.8	13.8	8.5	7.1	4.5	1.2	3.65	10.52	8	YHT-8S	YA-4, YA-5 YAT-4A, YAD-4A	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	1,000
8-6NS	UL SP	6.4	9.6	22.6	9.3	8.5	7.1	4.5	1.2	3.65	10.52	8	YHT-8S	YA-4, YA-5 YAT-4A, YAD-4A	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	1,000
8-8NS	UL SP	8.4	11.5	28.1	13.8	8.5	7.1	4.5	1.2	3.65	10.52	8	YHT-8S	YA-4, YA-5 YAT-4A, YAD-4A	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	1,000
14-5NS	UL SP	5.3	9.0	28.3	13.3	10.5	9.0	5.8	1.5	4.62	16.78	6	—	YA-5	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	100
14-6NS	UL SP	6.4	9.6	28.6	13.3	10.5	9.0	5.8	1.5	4.62	16.78	6	—	YA-5	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	100
14-8NS	UL SP	8.4	11.5	30.8	14.5	10.5	9.0	5.8	1.5	4.62	16.78	6	—	YA-5	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	100
22-5NS	UL SP	5.3	9.5	28.7	12.0	12.0	11.5	7.7	1.8	4.62 ~5.81	16.78 ~26.66	4	—	YA-5	YPT-60N, YPT-150-1 BCT-860L-1, BCT-8150L-B (本体) YF-1, E-4 (ヘッド) YET-60-1, YET-150-2	100

注) 本製品の中には多少納期を要するものもあります。



厚手形端子(E形)

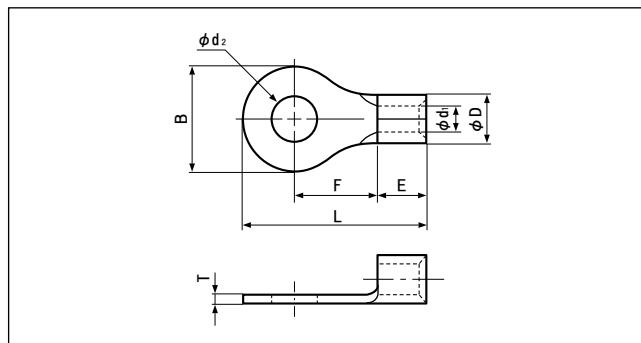

形番	寸法(mm)								適用電線範囲			適用圧着工具			1箱 入数 (個)
	ød ₂	B	L	F	E	øD	ød ₁	T	単線(mm)	撚線(mm ²)	AWG(#)	手動	空気圧式	油圧式	
1.25-3E	3.7	8.0	16.4	7.6	4.8	4.1	1.9	1.0	0.57	0.25	22	YHT-2210	YA-1, YA-2, YAT-1A YAT-2A, YAD-1A, YAD-2A	BCT-0555L	1,000
1.25-4E	4.3	8.0	16.4	7.6	4.8	4.1	1.9	1.0	1.44	1.65	16	YHT-2210	YA-4, YAT-4A, YAD-4A	BCT-0555L	1,000
2-4E	4.3	9.2	18.6	7.2	6.8	5.6	2.3	1.6	1.14	1.04	16	YHT-2210	YA-1, YA-2 YAT-1A, YAT-2A	BCT-0555L	1,000
2-5E	5.3	9.2	18.6	7.2	6.8	5.6	2.3	1.6	1.14	1.04	16	YHT-2210	YAT-1A, YAD-2A	BCT-0555L	1,000
2-6E	6.4	13.6	25.3	11.7	6.8	5.6	2.3	1.6	1.82	2.63	14	YHT-2210	YAD-1A, YAD-2A YA-4, YAT-4A	BCT-0555L	500
2-8E	8.4	13.6	25.3	11.7	6.8	5.6	2.3	1.6	1.82	2.63	14	YHT-2210	YAD-1A, YAD-2A YA-4, YAT-4A	BCT-0555L	500
2-10E	10.5	13.6	25.3	11.7	6.8	5.6	2.3	1.6	1.82	2.63	14	YHT-2210	YAD-1A, YAD-2A YA-4, YAT-4A	BCT-0555L	500

注1) E形のøD寸法は同形番の裸端子のøD寸法にくらべ1サイズ大きくなっており、工具歯形もYHT-2210の3歯形のうち、1サイズ上のものを使用します。

注2) 本製品の中には多少納期を要するものもあります。